# AH4000 SERIES 180mm chart MULTI-POINT TYPE HYBRID MEMORY RECORDER



AH4000 series is a h ybrid recorder which employs bright and clear, easy to vie w LCD display.

Measuring value display is prepared as 1 point display, multi-points simultaneous display and digital display + bar graph display.

Various measuring and recording settings can be easily done by front key switch and confirmed by LCD digital display.



#### **FEATURES**

#### Corresponds to SD card

Equipped with SD card (sold separ ately) and it can record data, read and write setting value.

#### •Full multi range

Equipped with DC voltage 10 kinds, T/C 36 kinds, RTD 12 kinds, in total 58 kinds. Easily set the r ange per channels.

# Easy data management by communication interface

Provided with USB por t and connect with PC directly . RS232C, RS422A, RS485 and Ether net communication interface is optionally prepared. When Ethernet is selected, settings from the web and E-mail alarm notification are added.

#### Package Software attached.

By Data acquisition softw are, the use of application expands from recording/management to inf ormation processing.

\*Optional communication interface required.

Data analysis softw are can repla y display, wave process, editing and trend display.

Parameter setting softw are can manage the setting information on PC.

#### Standard alarm display/ Printing function

Set 4 types of alar m per each input points. When alarm occurs, status display "ALM" flashes and measuring value flashes at LCD operation screen.

#### Chart end detection function available

Can set the alar m operation when char t end is detected.

#### Various programming function

Process the measured data by programming setting and displayed/recorded data of each channels are shown as programmed result data.

#### **MODELS**

#### Input point

06: 6 points 12: 12 points 24: 24 points

#### **Communication interface (option)**

N: None

E: Ethernet (Std. for US Spec)

R: RS232C

A: RS422A/RS485

Q: RS232C+RS485

C: RS422A/RS485+RS485

G : Ethernet + RS422A/RS485

+RS485

## Alarm output / remote contacts (option)

0 : None

2 : Mechanical relay 2 points ('a' contact)

4 : Mechanical relay 4 points ('c' contact)

+ remote contact 5 points

A: Mechanical relay 6 points ('a' contact)

+ remote contact 5 points

8 : Mechanical relay 8 points ('c' contact)

+ remote contact 10 points

B: Mechanical relay 12 points ('a' contact)

+ remote contact 10 points

F : Mechanical relay 16 points ('c' contact)

+ remote contact 20 points


D : Mechanical relay 24 points ('a' contact)

+ remote contact 20 points

**Power supply** 

A: 100-240V AC

#### NAME

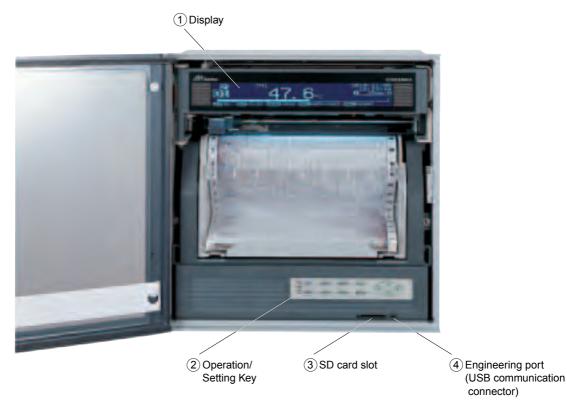

#### 1. Graphic LCD display

Display measured data by digital display and analog indication by bar graph display.

#### 1 point display



#### 6 points simultaneous display

01	48. 8 <sup>™</sup>	81.3 <sup>111</sup>	113.4
SD 04	145. 0 😇	176. 0 🎟	206. 2

#### 2. Front key switch

Setting contents can be easily registered by front key switch.



#### 3. SD card slot

Save measured data to SD card b y designated inter val (Fastest 12 points: 2 sec). Also, register measuring / recording condition such as r ange, scale, chart speed and when required, setup the unit by registered conditions.

#### 5. White LED chart illumination

Set ON/OFF/AUTO (OFF after no operation for 3 minutes).

#### ●1 point display + bar graph display



#### ●24 points simultaneous display

EV SILE	<b>E</b>	100.7	ER DATE	111.2	100
	M 201.1	FR. 1901.1	III and	10.4	E 38.3
EXIL BITLE	BR 403.5	E 122.9	EII 195.5	EL 486.3	10 -11
EN 418.1	EQ. 487.4	E -01.5	DI -013	E2 HM. F	Diam'r

Press Menu key and menu screen (list of setting items) will be displayed to graphic LCD.



#### 4. Engineering port at the front

Connect with PC b y mini-USB cab le\*. By attached setting software, you can set or change the parameter by PC.

\*Purchase commercialized product separately.






#### **RECORDING EXAMPLE**


#### Periodic data printing

Record the data with time, scale, chart speed, setting change mark and time line over trace printing by arbitrary interval.

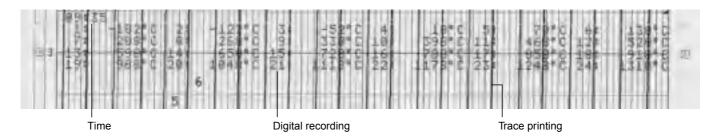


#### Data print

When the latest data is required, trace printing will stop and recorded.

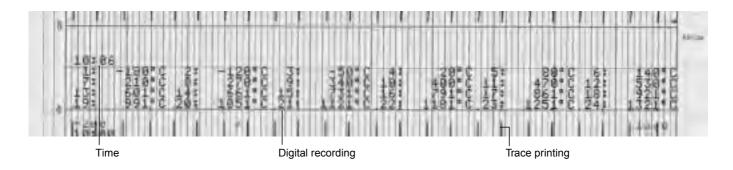

#### •Alarm activation and reset printing

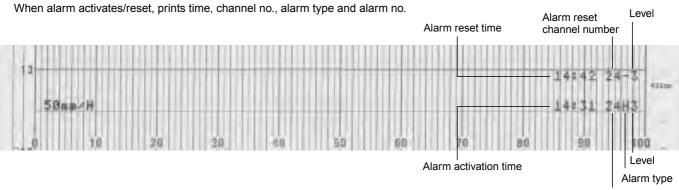

Alarm activation CH No.

#### INPUT SPECIFICATIONS

Measuring points: 6, 12, 24 Input types: DC voltage -

±13.8mV, ±27.6mV, ±69.0mV, ±200mV, ±500mV, ±1V ±5V, ±10V, ±20V, ±50V Max 50mA by external shunt

DC current ---

resistor

 $(100\Omega, 250\Omega)$  (sold separately)

Thermocouple

K, E, J, T, R, S, B, N, U, L, W-WRe26, WRe5-WRe26, PtRh40-PtRh20, NiMo-Ni, CR-AuFe, Platinel II, Au/Pt

Resistance thermometer

Pt100, old Pt100, JPt100, Pt50,

Accuracy ratings: Refer to the table of measuring

range/accuracy ratings/display resolution

Measuring interval: 1 second/ 6 points, 2 seconds/ 12 points, 2 seconds/ 24 points

Input resolution: About 1/40,000 or better (converted to

Reference junction compensation accuracy:
At ambient temperature:23°C±10°C
K, E, J, T, N Platinel II --±0.5°C or EMF 20µV, whichever

greater

Other than above -

±1.0°C or EMF 40µV, whichever

Burnout:

greater
Burnout detection function for thermocouple input and RTD input. Upper burnout, lower burnout or burnout disabled is selectable for

each input. Maximum common mode voltage: 30V AC/60V DC

Common mode rejection ratio:

130dB or more (50/60Hz)

Normal mode rejection ratio:

50dB or more (50/60Hz) Terminal board: Removable when wiring

#### DISPLAY SPECIFICATIONS

Analog display: Digital display:

LCD bar graph 180mm Monographic type LCD (Backlight AUTO / Always ON settable) Dots: 264 x 48 dots Display area: 184 x 22mm

Display item: All channels simultaneous display,

year/month/day, hour/minute, alarm activate channel, chart speed display of measuring value. REC, CARD, ALM

Status display:

#### ALARM DISPLAY

Status display "ALM" flash, measuring value flash at operation screen Alarm display:

Alarm types:

Absolute alarm, differential alarm, rate-of-change alarm, FAIL, calendar timer, chart end. Individual settings, Max 4 levels/channel Mechanical relay 2, 6, 12, 24 points ('a' contact) Mechanical relay 4, 8, 16 points ('c' contact) Alarm settings: Alarm output:

### STANDARDS (CONFORMITY PENDING) E marking: EN61326-1

CE marking:

EN61010-1

\*Under EMC test condition, variation in

indication value is ±20% or ±2mV at maximum, whichever is larger.
UL61010-1 2nd edition
CAN/CSA C22.2 No.61010-1-04
IEC 60529 IP54

CSA (C-UL):

Protection:

#### RECORDING SPECIFICATIONS

Dotting interval: 5 seconds/point, 2.5 seconds/point

Interlock to chart speed Recording method: Wire-dot type 6-color ribbon

Record/Printed color:

Trace printing (default colors)

Channel no.	1, 7 13,19	2, 8 14,21	3, 9 15,21		
Color	Red	Black	Blue		
Channel no.	4, 10 16,22	5,11 17,23	6,12 18,24		
Color	Green	Brown	Purple		

Digital recording

Periodic data printing	Repetition of red, black, blue, green, brown and purple
Alarm printing	Activate: Red, Reset: Green
List printing	Black (channel each items color are same as trace printing color)

Fan-fold type Chart paper:

Total width 200mm, total length 20m, effective

chart width 180mm

1 to 1500mm / h, in 1mm/h increments Chart speed: (12.5mm / h can be set exceptionally)

Periodic data printing.

Digital printing is added to trace printing at channel no.. data, unit month / day, time, channel no., data, unit Interval (hour/time) arbitrary setting. When required, interrupt trace printing and

Data printing: digital print time and measuring value. Alarm printing:

Alarm activated --- Time, channel no., alarm

type and level

Alarm reset --- Time, channel no., alarm level Memory capacity --- Max. 48 data
When required, interrupt trace printing and print date, chart speed and setting information of

List printing:

each channel.

Print when required Message printing:

Up to 15 characters/message, register up to 20

characters.

ON/OFF of display and recording:
Select ON / OFF of display per each channel, trace recording to chart, digital recording to

chart, recording to SD card

Subtract printing: Record difference between reference channel

and measuring value or between reference

value (set value) and measuring value. 2 / 3 / 4 divisions

Zone printing: 2 / 3 / 4 divisi Compressed/Expanded printing:

Range limit is made non-linear and specific chart recording lower/upper limit is shrunk or


expanded.

Automatic range shift printing:

Recording range is shifted automatically to another set range when measured value exceeds the current range. Overlap function available.

Skip function: No display or printing of channels of which

ranges are not set.

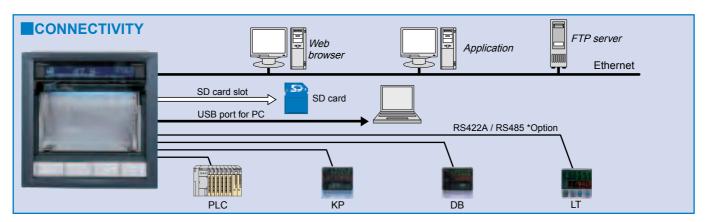



#### ■GENERAL SPECIFICATIONS

Rated power voltage:

100 to 240VAC, 50/60Hz

Maximum power consumption:

Max 65VA

100V AC balanced: 22VA, 240V AC balanced: 31VA

Normal operation condition:

Ambient temperature range: 0 to 50°C (20 to 65%) Ambient humidity range: 20 to 80%RH (5 to 40°C) Power voltage:90 to 264V AC Power frequency:50/60Hz ±2% Attitude: forward tilting 0°,

backward tilting 0 to 30°, left/right 0 to 10°

Case material: Door --- Aluminum die-casting

Front panel --- Glass

Case --- Cold-rolled steel plate

Door--- Black (equivalent of Munsell N3.0) Case color:

Glass--- Clear and colorless

Case --- Gray (equivalent of Munsell N7.0)

Mounting: Panel mounting Weight: About 7.6kg Terminal screw: Power terminal

Protective conductor terminal --- M4.0

Measuring input terminal, alarm output terminal

Remote contact terminal --- M3.5 Communication terminal --- M3.0

#### OPTIONS

Remote contact: By external relay contact signal

(digital contact: short or open), you can select

chart speed or data printing

Input points: 5 points, 10 points, 20 points Input signal: Digital contact signal or open collector signal

Exterior output: 5V DC/2mA Function: 1. Record start/stop

2. Chart speed 3-speed switch

3. Data printing

4. List printing

Message printing

6. Operation record
(Record ON/OFF condition to the designate location by bar line)

7. Integration/F value reset

8. Memory card (record start/stop)

9. Alarm output rest 10. Time correction

Alarm output: Mechanical relay ('a' contact) 2 points, 6 points,

12 points, 24 points

Max. load 100 to 240VAC 0.2A

30V DC 0.2A

Min. load 5V DC 10mA

Mechanical relay ('c' contact) 4 points, 8 points,

16 points

Max. load 100 to 240VAC 0.2A

30V DC 0.2A

Min. load 5V DC 10mA

Communication interface: RS232C, RS422A, RS485, Ethernet

#### **ACCESSORIES**

	512MB	Model : RZ-SMC512
SD Card	1GB	Model: RZ-SMC1G
	2GB	Model: RZ-SMC2G

#### MEASURING RANGES/ACCURACY RATING/DISPLAY RESOLUTION

	nput type	-13.8		ng range		Accuracy ratings	resolution
				13 2m\/	±13.8mV		10μV
		-27.6		13.8mV 27.6mV	±13.6mV		10μV
_	mV	-69.0		69.0mV	±69.0mV		10μV
ō		-200	to	200mV	±200mV		100μV
č		-500	to	500mV	±500mV	±0.1% ±1digit	100μV
DC voltage					43.4		
		-1	to	1V			10mV
	V	<u>-5</u>	to	5V			10mV
		-10	to	10V	± 10V ± 20V		10mV
		-20	to	20V			10mV
		-50	to	50V	± 50V		10mV
	17	-200	to	300°C	±13.8mV	-	0.1°C
	K	-200	to	600°C	±27.6mV		0.1°C
		-200	to	1370°C	±69.0mV		1 °C
	_	-200	to	200°C	±13.8mV		0.1°C
	E	-200	to	350°C	±27.6mV		0.1°C
		-200	to	900°C	±69.0mV		1 °C
		-200	to	250°C	±13.8mV		0.1°C
	J	-200	to	500°C	±27.6mV		0.1°C
		-200	to	1200°C	±69.0mV		1 °C
	Т	-200	to	250°C	±13.8mV		0.1°C
		-200	to	400°C	±27.6mV		0.1°C
	R	0	to	1200°C	±13.8mV		1 °C
	ĸ	0	to	1760°C	±27.6mV		1 °C
	c	0	to	1300°C	±13.8mV		1 °C
S	3	0	to	1760°C	±27.6mV		1 °C
_	В	0	to	1820°C	±13.8mV		1 °C
The		-200	to	400°C	±13.8mV	±0.1% ±1digit	0.1°C
m	N	-200	to	750°C	±27.6mV		0.1°C
000		-200	to	1300°C	±69.0mV		1 °C
Thermocouple		-200	to	250°C	±13.8mV		0.1°C
Эe	U	-200	to	500°C	±27.6mV		0.1°C
	Ü	-200	to	600°C	±69.0mV		0.1°C
		-200	to	250°C	±13.8mV		0.1°C
							0.1°C
	L	-200 to 500°C ±27.6mV -200 to 900°C ±69.0mV					
-	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	-200	to				1 °C
-	W-WRe26 WRe5-WRe26	0		2315°C	±69.0mV		1 °C 1 °C
	VVReb-VVRe20	0		2315°C	±69.0mV		
	NI:NA= NI:	0	to	290°C	±13.8mV		0.1°C
	NiMo-Ni	0	to	600°C	±27.6mV		0.1°C
		0	to	1310°C	±69.0mV		1 °C
		0	to	350°C	±13.8mV		0.1°C
	Platinel <b>II</b>	0	to	650°C	±27.6mV		0.1°C
	DID! 10 -:-:	0	to		±69.0mV		1 °C
	PtRh40-PtRh20	0	to	1880°C	±13.8mV	±0.2%	1 °C
	CR-AuFe	0	to	280 K	±6.9mV	±1digit	0.1 K
	Au/Pt	0	to	1000°C	±27.6mV		0.1°C
		-140	to	150°C	160Ω		0.1°C
	Pt100	-200	to	300°C	220Ω		0.1°C
		-200	to	649°C	340Ω		0.1°C
		-200	to	850°C	400Ω		0.1°C
		-140	to	150°C	160Ω	±0.1%	0.1°C
	Old Pt100	-200	to	300°C	220Ω	±0.1% ±1digit	0.1°C
RTD		-200	to	649°C	340Ω		0.1°C
	JPt100	-140	to	150°C	160Ω		0.1°C
		-200		300°C	220Ω		0.1°C
		-200		649°C	340Ω		0.1°C
	Pt50	-200	to	649°C	220Ω		0.1°C
						±0.15%	
	Pt-Co	. 4	to	374K	220Ω	±1digit	0.1 K

condition. Thermocouple input does not contain reference junction compensation accuracy. K, E, J, T, R, S, B, N : IEC584(1977, 1982), JIS C 1602-1995, JIS C 1605-1995

W-WRe26, NiMo-Ni, Platinel II, PtRh40-PtRh20, CR-AuFe, Au/Pt : ASTM E1751 WRe5-WRe26 : ASTM E988 U, L : DIN43710-1985 Pt100 : IEC751(1995), JIS C 1604-1997

Old Pt100 : IEC751(1983), JIS C 1604-1989, JIS C 1606-1989

JPt100 : JIS C 1604-1981, JIS C 1606-1986, Pt50 : JIS C 1604-1981 Pt-Co : CHINO




# APPLICATION SOFTWARE (standard attached) Data Acquisition Software You can acquire data easily to your PC. \*Optional communication interface required List Data Screen Trend Data Screen Data Analysis Software

#### TERMINAL ARRANGEMENT

Alarm relay output (24 points 'a' contact) + remote contacts (20 points) and communication interface


Communication terminal \*RS232C and RS422A/485 are specified on purchase sp

Open the binary file recorded in the SD card, replay display and edit the trend of acquired data file.

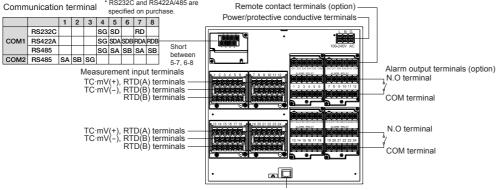


Ethernet connector (option)


#### • Alarm relay output (16 points 'c' contact) + remote contacts (20 points) and communication interface

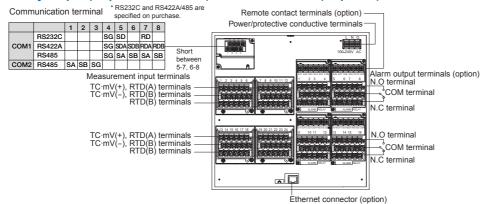

#### DIMENSIONS



#### Panel cutout



Specifications subject to change without notice. Printed in Japan (I) 2011. 12

#### CHINO CORPORATION

\*Max216. When alarm output/remote contacts unit and communication unit are added

32-8 KUMANO-CHO, ITABASHI-KU, TOKYO 173-8632

Telephone: +81-3-3956-2171 Facsimile: +81-3-3956-0915 E-mail: inter@chino.co.jp Website: www.chino.co.jp/